

ExperFloor AS 45

RENK: Transparent

1
±%2 KG




Floor Systems

605301

GÜVEN MADENCİLİK İNŞAAT SAN. ve TİC. A.Ş.

A SOLUTION THAT PROVIDES NON-SLIP PROPERTIES ON GLAZED COATINGS SUCH AS CERAMICS, PORCELAIN AND MARBLE WITH GLOSSY AND GLASSY SURFACES

It is a transparent and ready-to-use solution that provides non-slip surfaces such as glossy, slippery tiles and ceramics, permanently increasing the surface friction coefficient without creating a film layer and changing the appearance of the applied surface.

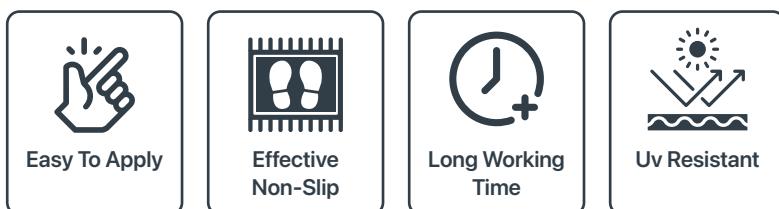

TECHNICAL SPECIFICATIONS

Density	1,01 g/cm ³ (±0,02)
Application period	25-35 min
Service Temperature	(-20)°C - (+80)°C
Consumption	100-200 g/m ² (Depends on the application surface.)

* All technical values are calculated at +23°C and 55% relative humidity. Changes in temperature and humidity change the technical values.

ADVANTAGES

- It is applied easily and quickly.
- It doesn't create a film layer. It provides a permanent effect.
- It doesn't change the appearance of surface.
- It is not affected by thermal shock and UV rays.
- It provides long-lasting effect.

SCOPE OF APPLICATION

- Indoors and outdoors,
- Horizontal and vertical surfaces,
- Wet areas such as bathrooms, kitchens, pools, balconies and terraces,
- Surfaces such as ceramics, tiles, granite, marble and natural stone,

It is used as a non-slip solution.

SURFACE PREPARATION

- The application surface must be dry. It should be cleaned from dust, dirt, rust, paint, oil and similar substances that will reduce adherence. If necessary, the surface should be washed with plenty of water and dried before the procedure.

PREPARATION OF THE MIXTURE

- ExperFloor AS 45 prime is ready to use. It should be shaken before opening the package.

APPLICATION DETAILS

ExperFloor AS 45 should be applied to the surface with a roller or brush.

The product should be poured into a large container and applied to the entire surface.

It should be ensured that the surface is completely covered and a non-porous coat is formed.

After 30-35 minutes, the surface should be rinsed with plenty of water.

If more friction force is desired, the waiting time after application can be extended in a controlled manner.

ExperFloor AS 45

RENK: Transparent

1
±%2 KG



Floor Systems

605301

GÜVEN MADENCİLİK İNŞAAT SAN. ve TİC. A.Ş.

WARNINGS

- Do not apply in weather conditions below +5°C, above +35°C, and in outdoor areas during rainy weather.
- Water or any other diluent should not be added to the product.
- Surface wear may occur especially in cement based grouts.
- After application, the surface should be cleaned with a hard brush and plenty of water if necessary.
- In ceramics with patterns or surface paint, surface dulling and fading/erasure may occur.

CONSUMPTION

- 100-200 g/m² (Depends on the application surface.)

EQUIPMENT CLEANING

- Equipment should be cleaned with soapy water immediately after use.

STORAGE AND SHELF LIFE

- It should be stored in its unopened original packaging, in a dry environment, protected from frost, between +5°C and +30°C. The products should not be overloaded in a way that would damage their packaging.
- Shelf life under proper storage conditions is 12 months from the date of manufacture. Since products in opened packages will freeze in a short time; they should not be stored again and should be consumed.

SAFETY PRECAUTIONS

During its use, work clothes, protective gloves and masks should be used in accordance with the Occupational and Occupational Health rules. Eye, mouth and skin contact should be avoided, the contacted area should be washed with plenty of water. In more dangerous situations or if the product is swallowed, a specialist should be consulted immediately. Food and beverages should not be brought into the application areas. It should be kept out of reach of children. For detailed information, the Safety Data Sheet (MSDS) should be consulted.

RESPONSIBILITY

Güven Madencilik İnş. San. ve Tic. A.Ş. is only responsible for the quality of EXPERAS branded products. All presented data have been created as a result of practical and scientific studies. The manufacturer cannot be held responsible except for the use of the right products in appropriate areas and conditions.

LEGAL NOTES

The information and usage recommendations regarding EXPERAS branded products are presented in good faith in the direction of technical knowledge and experience, provided that they are kept and intervened under normal conditions and in accordance with the recommendations. Along with the products, areas of use and surfaces can differ a lot. It is necessary to ensure that the right EXPERAS branded products are applied on the appropriate ground and conditions. In addition, all information and instructions given on commercial factors and technical compliance must be strictly followed. The manufacturer cannot be held responsible for any damage or problem that may occur if it is not complied with. The applier/user is responsible for making the relevant checks to ensure these details. The specifications of EXPERAS branded products can be changed when necessary. The property rights of third parties must be respected. When the purchase order is confirmed, all technical conditions in terms of sales and shipping are essential.

HEADQUARTER:
Ege Perla B Kule Kat: 23 No: 231/232
Konak - Izmir / Turkiye
T: +90 (232) 422 03 93

FACTORY:
Salihli OSB 302 Cadde No: 2
Salihli - Manisa / Turkiye
T: +90 (276) 234 00 15



MADE IN TÜRKİYE

NETHERLANDS SALES OFFICE
EXPERAS B.V.
Gouke Boelensstraat 120 9203 RS Drachten

UK OFFICE:
Okka Global LTD, Mappin House, 4 Winsley Street
London W1W 8HF, United Kingdom
T: +44 (7880) 802 123

- 🌐 www.experas.com
- ✉ info@experas.com
- FACEBOOK experas
- TWITTER @experas
- LINKEDIN experas
- INSTAGRAM experasc